


LIGHTING NOTES INDICATED BY SYMBOL: 'X'

- 1 ALL LIGHT SWITCHES SHALL BE INSTALLED AT 48" A.F.F. TO ACCOMMODATE A.D.A. REQUIREMENTS, UNLESS NOTED OTHERWISE.
- 2 EMERGENCY FIXTURES ARE INDICATED AS CROSSHATCHED.
- 3 SPECIFIC EMERGENCY FIXTURES WITH THIS NOTE SHALL BE PURCHASED AND WIRED SUCH THAT THE FIXTURE CAN BE SWITCHED OFF BUT WILL ILLUMINATE DURING AN ACTUAL POWER OUTAGE.
- 4 CIRCUIT SHALL BE CONTROLLED BY COMBINATION OF PHOTOCELL AND TIME CLOCK. PHOTOCELL SHALL TURN FIXTURE 'ON' AND TIMER SHALL TURN FIXTURE 'OFF'. REFER TO CONTROL SCHEDULE.
- 5 WHERE INDICATED, LIGHTING CIRCUIT SHALL BE CONTROLLED VIA AUTOMATIC LIGHTING CONTROL SYSTEM AND LOCAL SWITCHES. REFER TO CONTROL SCHEDULE.
- 6 CEILING MOUNTED MOTION SENSING DEVICES ARE SHOWN WHERE REQUIRED. CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFICATION AND LOCATION OF DEVICE FOR REQUIRED COVERAGE AREA. DASHED LINES INDICATED LOW VOLTAGE CONTROL INTENT.
- 7 PROVIDE EIGHT (8) TOGGLE SWITCHES FOR FUTURE TRACK LIGHTING CIRCUITS AT EXHIBIT AREA. THESE SWITCHES SHALL BE REPLACED WITH THE APPROPRIATE TYPE DIMMER SWITCH(ES) WHEN FUTURE TRACK LIGHTING IS INSTALLED. CIRCUITS SHALL HAVE SEPARATE NON-SHARED NEUTRAL FOR EACH DIMMED CIRCUIT.
- 8 PROVIDE TWO (2) TOGGLE SWITCHES FOR FUTURE TRACK LIGHTING CIRCUITS AT MULTI-PURPOSE ROOM. THESE SWITCHES SHALL BE REPLACED WITH THE APPROPRIATE TYPE DIMMER SWITCH(ES) WHEN FUTURE TRACK LIGHTING IS INSTALLED. CIRCUITS SHALL HAVE SEPARATE NON-SHARED NEUTRAL FOR EACH DIMMED CIRCUIT.
- 9 PROVIDE ONE TOGGLE SWITCH FOR FUTURE TRACK LIGHTING CIRCUITS AT DISPLAY WINDOWS. THIS SWITCH SHALL BE REPLACED WITH THE APPROPRIATE TYPE DIMMER SWITCH WHEN FUTURE TRACK LIGHTING IS INSTALLED. CIRCUIT SHALL HAVE SEPARATE NON-SHARED NEUTRAL FOR EACH DIMMED CIRCUIT.
- 10 FUTURE EXHIBIT AREA, MULTI-PURPOSE ROOM, AND DISPLAY WINDOW LIGHTING SHALL BE SELECTED BY OWNER. PROVIDE J-BOX WITH CIRCUITS AS NOTED. MAXIMUM WATTAGE ALLOWED IN COMCHECK FOR ALL LIGHTING NOTED IS 4100 WATTS.
- 11 VERIFY MOUNTING OF EMERGENCY EXIT SIGNS WITH OWNER. WHERE POSSIBLE INSTALL BETWEEN 7'-6" AFF TO 9'-0" AFF.
- 12 LOW VOLTAGE CONTROL STATION. REFER TO LIGHTING CONTROL SCHEDULE AND NOTES ON SHEET E2.2.
- 13 CONTRACTOR SHALL AIM EMERGENCY HEADS TO ACHIEVE REQUIRED LIGHT LEVELS (0.1 FC MIN/1.0 FC AVG) ON PATH OF EGRESS.
- 14 ALL DIMMED CIRCUITS SHALL HAVE SEPARATE NON-SHARED NEUTRAL FOR EACH DIMMED CIRCUIT.
- 15 ALL EMERGENCY FIXTURES AND EXIT LIGHTS SHALL BE CONNECTED TO THE UNSWITCHED HOMERUN OF THE LIGHTING CIRCUIT INDICATED FOR CONSTANT POWER TO THE BATTERY.



NORTH

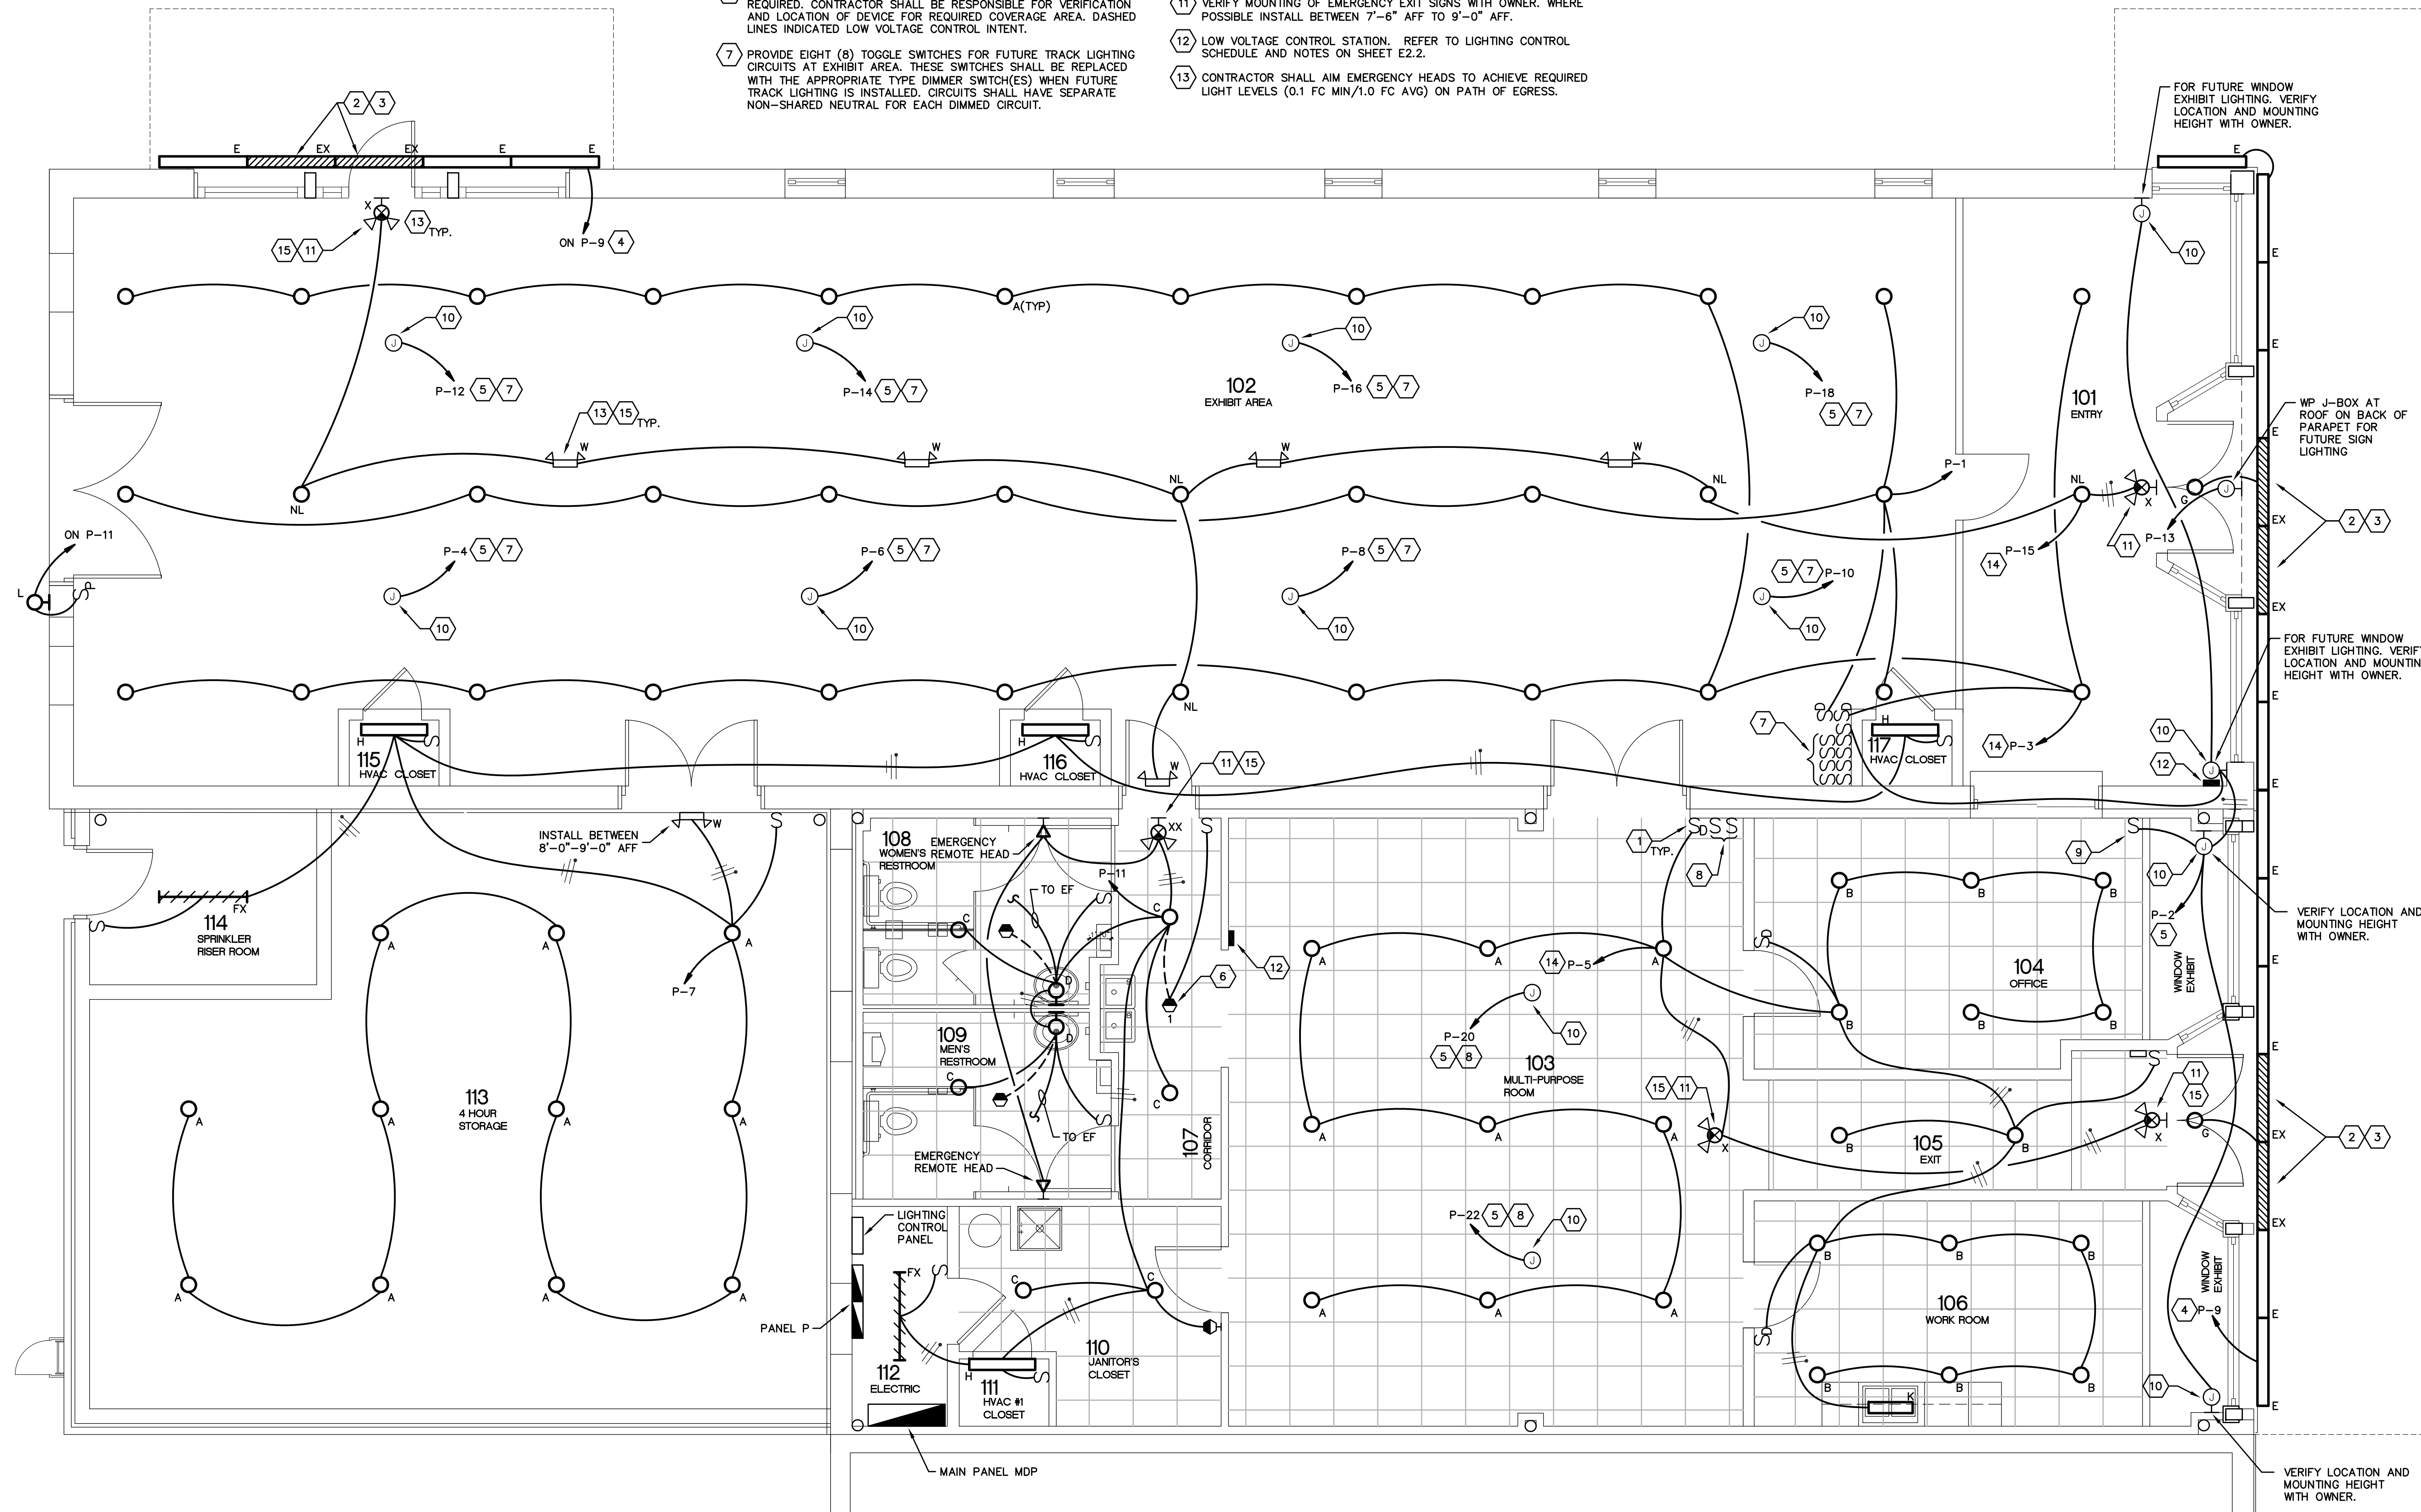

1

FLOOR PLAN - LIGHTING

SCALE: 1/4"=1'-0"

SHOP DRAWING ELECTRONIC FILES

FOR PREPARATION OF SHOP DRAWINGS, CONTRACTOR MAY, AS AN OPTION, OBTAIN ELECTRONIC FILES IN AUTOCAD OR DXF FORMAT FROM THE ENGINEER FOR A PRODUCTION, SHIPPING, AND HANDLING FEE OF \$100 FOR A DRAWING SET UP TO 10 SHEETS AND \$10 PER SHEET FOR EACH ADDITIONAL SHEET. CONTACT THE ENGINEER TO OBTAIN THE NECESSARY RELEASE AGREEMENT FORM AND TO INDICATE THE DESIRED SHIPPING METHOD AND DRAWING FORMAT. IN ADDITION TO PAYMENT, ENGINEER'S EXECUTED RELEASE AGREEMENT FORM MUST BE RECEIVED BEFORE ELECTRONIC DRAWING FILES WILL BE SENT. THE AGREEMENT MUST BE NOTARIZED AND FILLED OUT IN FULL. THE ENTIRE PROCESS WILL REQUIRE A MINIMUM OF FIVE BUSINESS DAYS.