



ROOM FINISH SCHEDULE						
ROOM#	ROOM NAME	FLOOR	BASE	WALLS	CEILING	CLG. REMARKS
101	ENTRY	SEALD CONC.	WOOD	BRICK & PAINT	PAINTED BEAD BO.16'-0"	-
102	EXHIBIT AREA	SEALD CONC.	WOOD	BRICK & PAINT	PAINTED BEAD BO.16'-0"	-
103	MULTI-PURPOSE ROOM	WD VINYL PLANK WOOD	WOOD	PAINT	SUSP. 2'x2 P. TIN 14'-6"	-
104	OFFICE	WD VINYL PLANK WOOD	WOOD	PAINT	SUSP. 2'x2 P. TIN 14'-6"	-
105	WORK ROOM	WD VINYL PLANK WOOD	WOOD	PAINT	SUSP. 2'x2 P. TIN 14'-6"	-
106	EXHIBIT AREA	WD VINYL PLANK WOOD	WOOD	PAINT	SUSP. 2'x2 P. TIN 14'-6"	-
107	CORRIDOR	WD VINYL PLANK WOOD	WOOD	PAINT	SUSP. 2'x2 P. TIN 14'-6"	-
108	WOMEN'S RESTROOM	HEX CER. TILE	HEX CER. TILE	HEX CER. TILE	SUSP. 2'x2 P. TIN 9'-0"	-
109	MEN'S RESTROOM	HEX CER. TILE	HEX CER. TILE	HEX CER. TILE	SUSP. 2'x2 P. TIN 9'-0"	-
110	JANITOR CLOSET	4" VINYL CER. TL. & PAINT	SUSP. 2'x2 P. TIN 9'-0"	HEX CER. TILE	SUSP. 2'x2 P. TIN 9'-0"	-
111	HYAC CLOSET	EXISTING	NONE	EXISTING	2'x2 ACOSUS 8'-0"	-
112	ELECTRIC	SEALD CONC.	NONE	UNFIN. CMU	NONE	-
113	4 HOUR STORAGE	SEALD CONC.	NONE	UNFIN. CMU	NONE	-
114	SPRINKLER RISER ROOM	SEALD CONC.	NONE	UNFIN. CMU	NONE	-
115	HYAC CLOSET	PAINTED PLV.WD.	NONE	UNFIN. GYP. BD.	NONE	-
116	HYAC CLOSET	PAINTED PLV.WD.	NONE	UNFIN. GYP. BD.	NONE	-
117	HYAC CLOSET	PAINTED PLV.WD.	NONE	UNFIN. GYP. BD.	NONE	-

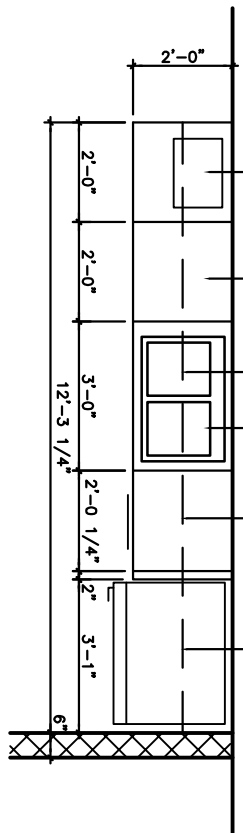


02 106 WORK ROOM CABINETS PLAN

SCALE: 1/2"=1'-0"

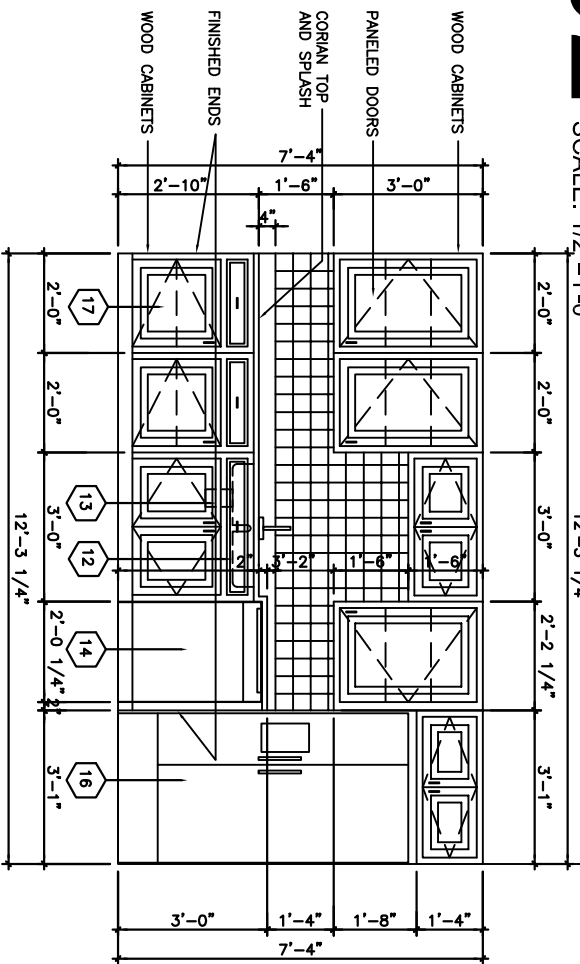

03 106 WORK ROOM CABINETS ELEV.

SCALE: 1/2"=1'-0"

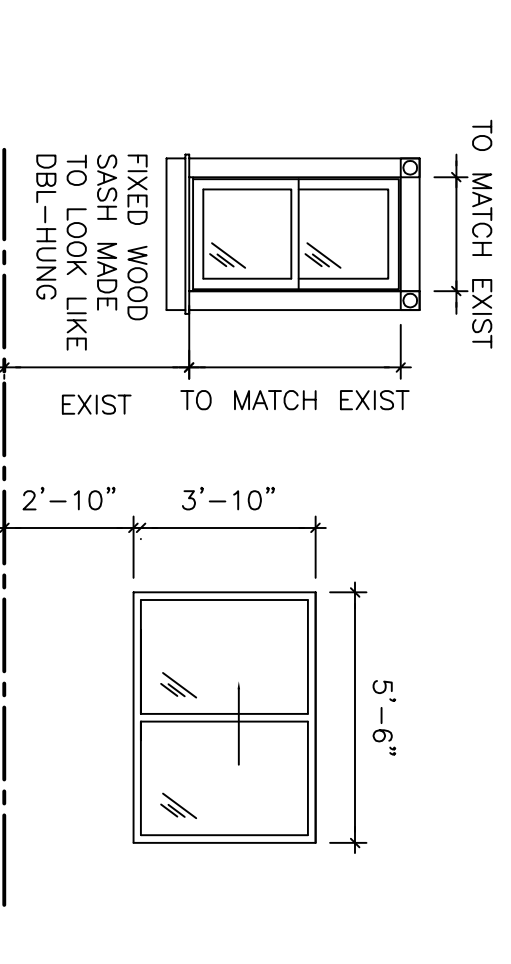


04 WINDOW TYPES

SCALE: 1/2"=1'-0"

WALL TYPES BY SYMBOL:

WALL TYPE NOTES:

- REFER TO DETAILS, SECTIONS, & SCHEDULES FOR FINISHES & ADDITIONAL INFORMATION.
- REFER TO SPECIFICATIONS FOR MATERIAL GRADES, TYPES, & OTHER INFORMATION.

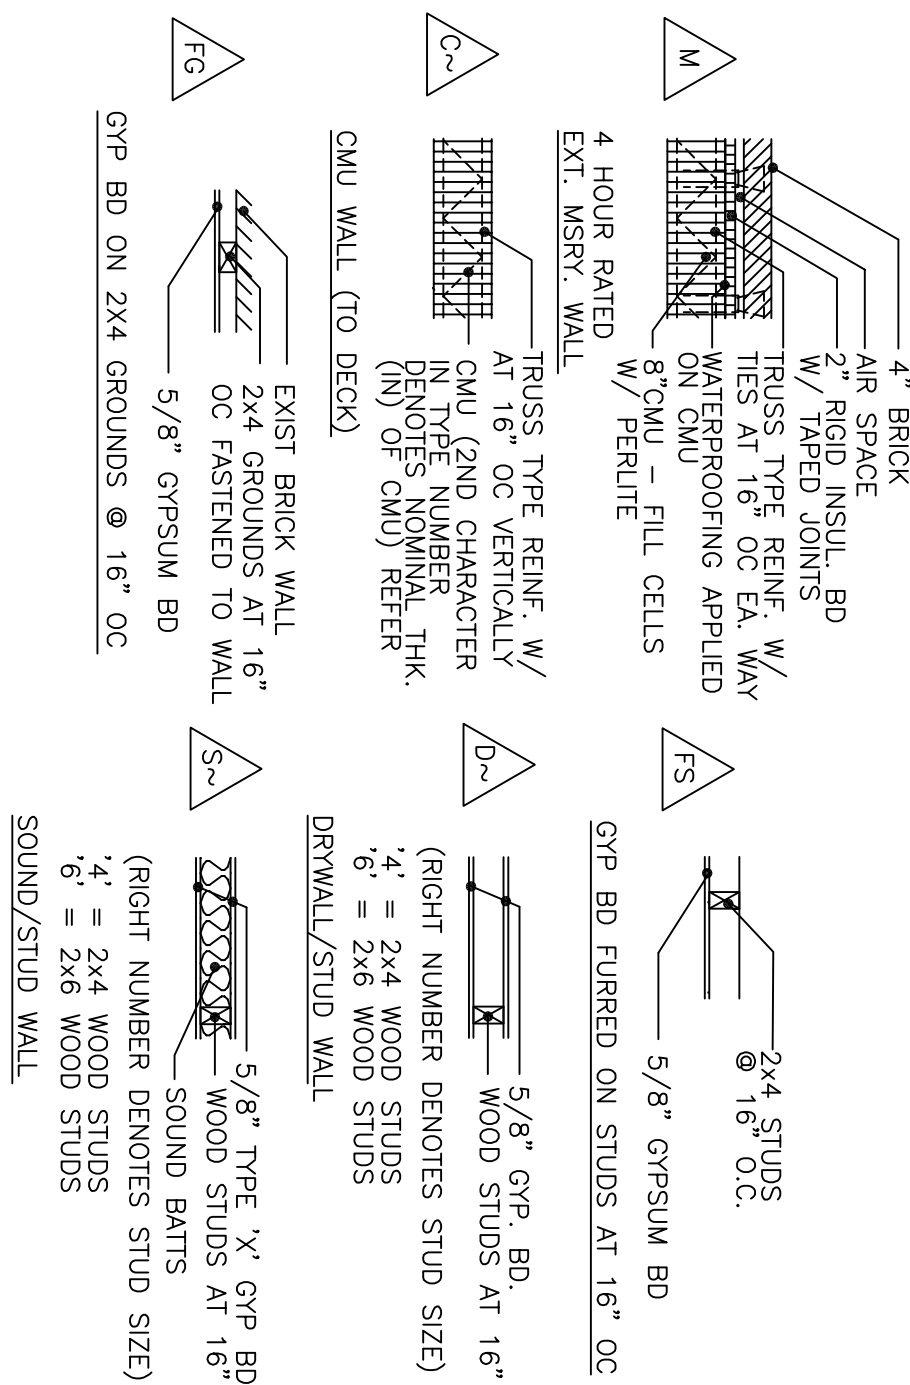

GENERAL NOTES: FLOOR PLAN

- DIMENSIONS ARE MEASURED FROM THE FOLLOWING
 - FACE OF MAJORARY
 - C. STUD WALLS ARE DIMENSIONED TO THE NOMINAL FACE OF STUD
 - DIMENSIONS SHALL HAVE PRECEDENCE OVER SCALE.
 - FIELD VERIFY EXIST CONDITIONS, NOTIFY THE ARCHITECT IF ANY DISCREPANCIES PRIOR TO COMMENCEMENT OF THE WORK

SIGNAGE

PROVIDE THE FOLLOWING SIGNS AT THE DESIGNATED LOCATIONS

- ONE SIGN "WOMEN" W/ HANDCAP LOGO AND BRAILLE PER TAS AT DOOR 14
- ONE SIGN "MEN" W/ HANDCAP LOGO AND BRAILLE PER TAS AT DOOR 15
- TWO SIGNS "RESTROOMS" W/ HANDCAP LOGO AND BRAILLE PER TAS AT DOOR 9 & AT OPENING TO CORRIDOR 107 IN MULTI-PURPOSE ROOM 103
- FOUR SIGNS "EMERGENCY EXIT ONLY – ALARM WILL SOUND IF OPENED" AT DOORS 2,3,9 AND 10
- ONE SIGN "OFFICE" AT DOOR 12
- ONE SIGN "WORK ROOM" AT DOOR 13
- ONE SIGN "JANITOR" AT DOOR 16
- ONE SIGN "STORAGE" AT DOOR 17
- ONE SIGN "OCCUPANT LOAD FOR THIS ROOM TO BE 49 PEOPLE MAXIMUM" AT DOOR 17


DOOR SCHEDULE

NO.	FROM/TO	LEAVES W X H	OPNG W X H	MATERIAL	TYPE	FIRE RATING (MIN)	HARDWARE REFER *LEGEND BELOW
1	EXTERIOR FROM 101 ENTRY	PAIR 72x43 91"	WD & GL	1	-	-	H4-WI-SI-TI-CI-LI-FB-EI
2	EXTERIOR FROM 103 EXIT	PAIR 72x43 91"	WD & GL	2	-	-	H4-WI-SI-TI-CI-LI-FB-AI
3	EXTERIOR FROM 102 EXHIBIT AREA	SINGLE 56x43 91"	WD & GL	1	-	-	H4-WI-SI-TI-CI-LI-FB-AI
4	102 EXHIBIT AREA FROM EXTERIOR	PAIR 36x43 84"	METAL	3	-	-	H3-WI-TI-CI-LI-FB-CL
5	EXT. FROM 114 SPRINKLER RISER RM	SINGLE 36x43 84"	SC WOOD	4	-	-	H3-L3-SS
6	102 EXHIB. AREA FROM 115 HYAC CL	SINGLE 36x43 84"	SC WOOD	3	-	-	H3-L3-SS
7	EXHIBIT AREA FROM 4 HR. STOR. RM	PAIR 36x43 84"	WOOD	4	-	-	H3-SI-CI-L3
8	102 EXHIB. AREA FROM 116 HYAC CL	SINGLE 36x43 84"	SC WOOD	4	-	-	H3-L3-SS
9	107 CORRIDOR TO 102 EXHIBIT AREA	SINGLE 36x43 84"	SC WOOD	4	-	-	H3-SI-CI-L3
10	103 MULTI-PURP RM TO 102 EXHIBIT	PAIR 72x43 84"	WOOD	4	-	-	H3-SI-CI-L3
11	102 EXHIB. AREA FROM 116 HYAC CL	SINGLE 36x43 84"	SC WOOD	4	-	-	H3-L3-SS
12	103 MULTI-PURP. RM TO 104 OFFICE	SINGLE 36x43 84"	WOOD	4	-	-	H3-SI-CI-L3
13	103 MULTI-PURP. RM TO 106 WK RM	SINGLE 36x43 84"	WOOD	4	-	-	H3-SI-CI-L3
14	107 CORR. TO 106 WOMEN'S RESTRM	SINGLE 36x43 84"	WOOD	4	-	-	H3-SI-CI-L3
15	107 CORR. TO 106 MEN'S RESTRM	SINGLE 36x43 84"	WOOD	4	-	-	H3-SI-CI-L3
16	102 EXHIB. AREA FROM 110 JAN CL	SINGLE 36x43 84"	WOOD	4	-	-	H3-SI-CI-L3
17	110 JAN CL FROM 112 ELECTRIC	SINGLE 36x43 84"	WOOD	4	-	-	H3-L3-SS
18	110 JAN CL FROM 111 HYAC CL	SINGLE 36x43 84"	WOOD	4	-	-	H3-L3-SS
19	101 ENTRY FROM 102 EXHIBIT AREA	SINGLE 36x43 84"	WOOD	5	-	-	H2-L3-EI

* DOOR HARDWARE LEGEND

H2 – 2 BOMBER GATE HINGES
H3 – 3 BUTT HINGES PER LEAF
H4 – 4 BUTT HINGES PER LEAF
W – WEATHERSTRIPPING
SI – STOP (FLOOR)
T1 – 1/2" HT ALUM. THRESHOLD
C1 – CLOSER W/ HOLD OPEN
L1 – LOCKSET (PANG-BAR)
L2 – LOCKSET (LEVER)
L3 – LOCKSET (Lever)
L4 – LOCKSET (OP. INSIDE ONLY)
E1 – ELECTRIC RELEASE
P1 – PASSAGE SET (LEVER)
P2 – PUSH / PULL (NO LOCK)
PB – PUSH / PULL (NO LOCK)
AI – ALARM RELEASE DOOR OPENED)
CL – CYLINDER DEABOLT (THUMB)

DOOR TYPES

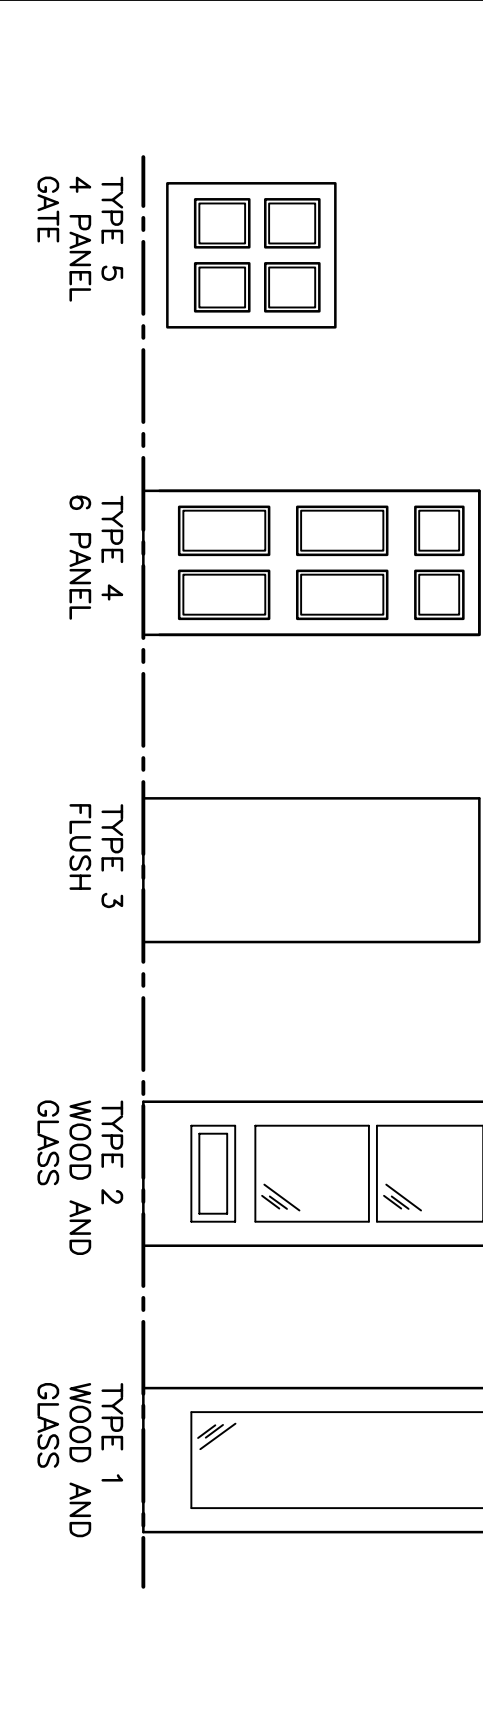

EQUIPMENT AND ITEMS

NO.	DESCRIPTION	MAKE AND MODEL	MOUNTING HEIGHT A.F.F.	REMARKS
1	HC. TANK TYPE WC	-	TOP OF SEAT – 17" TO 19"	-
2	REG. HT. WC	-	-	-
3	WALL HUNG URINAL	-	RM AT 17" MAX.	-
4	PEDESTAL LAVATORY	-	34" MAX.	-
5	DUAL HT. DRINKING FOUNTAIN	-	HC SPOUT AT 36" MAX.	-
6	P.LAM COVERED TILT PARTN	-	BOTTOM 1'-0". TOP 5'-10"	-
7	24" X 42" LOCKER SINK	-	4'-0" TO CENTER	-
8	24" X 42" WOOD CLOSET	-	-	-
9	HOT WATER HEATER	-	-	-
10	5'-0" DIA CLEAR FLR. SPACE	-	-	-
11	30" X 48" CLEAR FLR. SPACE	-	-	-
12	DOUBLE SS SINK & FAUCETS	-	TOP AT 2'-10"	* NOTE 1
13	DISPOSAL	-	-	* NOTE 1
14	DISHWASHER	-	-	* NOTE 1
15	MICROWAVE OVEN	-	-	* NOTE 1
16	REFRIG. W/ ICE MAKER	-	-	* NOTE 1
17	KITCHEN CABINETS	-	CORIAN TOP & SPLASH AT 34"	* NOTE 1

*NOTE 1 – FURN. BY OWNER, INSTALLED BY CONTRACTOR

TOILET ACCESSORIES

NO.	DESCRIPTION	MAKE AND MODEL	MOUNTING HEIGHT A.F.F.	REMARKS
A	PAPER TOWEL DISP	BOBRICK B-262	4'-0" TO BOTTOM	-
B	2 ROLL TIT TISSUE HOLDER	BOBRICK B-2245	1'-7" TO CENTER	-
C	GRAB BAR	BOBRICK B-69137	2'-10" TO CENTER	-
D	CLOTHES HOOK	BOBRICK B-216	4'-0" TO TOP	-
E	8"x18" SS SHELF	BOBRICK B-298 x 18	2'-8" TO TOP	-
F	24" X 36" FRAMED MIRROR	BOBRICK B-165	3'-2" TO BOTTOM	-
G	LIQUID SOAP DISPENSER	BOBRICK B-2111	3'-8" TO BOTTOM	-
H	SS NAPKIN DISPENSER	BOBRICK B-220	ALIGN BOT. W/ BOT. OF PARTN	-
J	MOP AND BROOM HOLDER	BOBRICK B-223 x 24	6'-4" TO CENTER	-

ADDITION, RENOVATIONS AND RECONSTRUCTIONS FOR

SPELLMAN MUSEUM OF FORNEY HISTORY

200 S. BOIS D'ARC STREET - FORNEY, TEXAS 75126

DETAIL
PLANS &
SCHEDULES

MONTH DAY YEAR

A1.4

05 FLOOR SINK

SCALE: 1/2"=1'-0"

06 DR. SPACE


SCALE: 1/2"=1'-0"

07 HC TLT.

SCALE: 1/2"=1'-0"

08 HC SIGN

SCALE: 1/2"=1'-0"

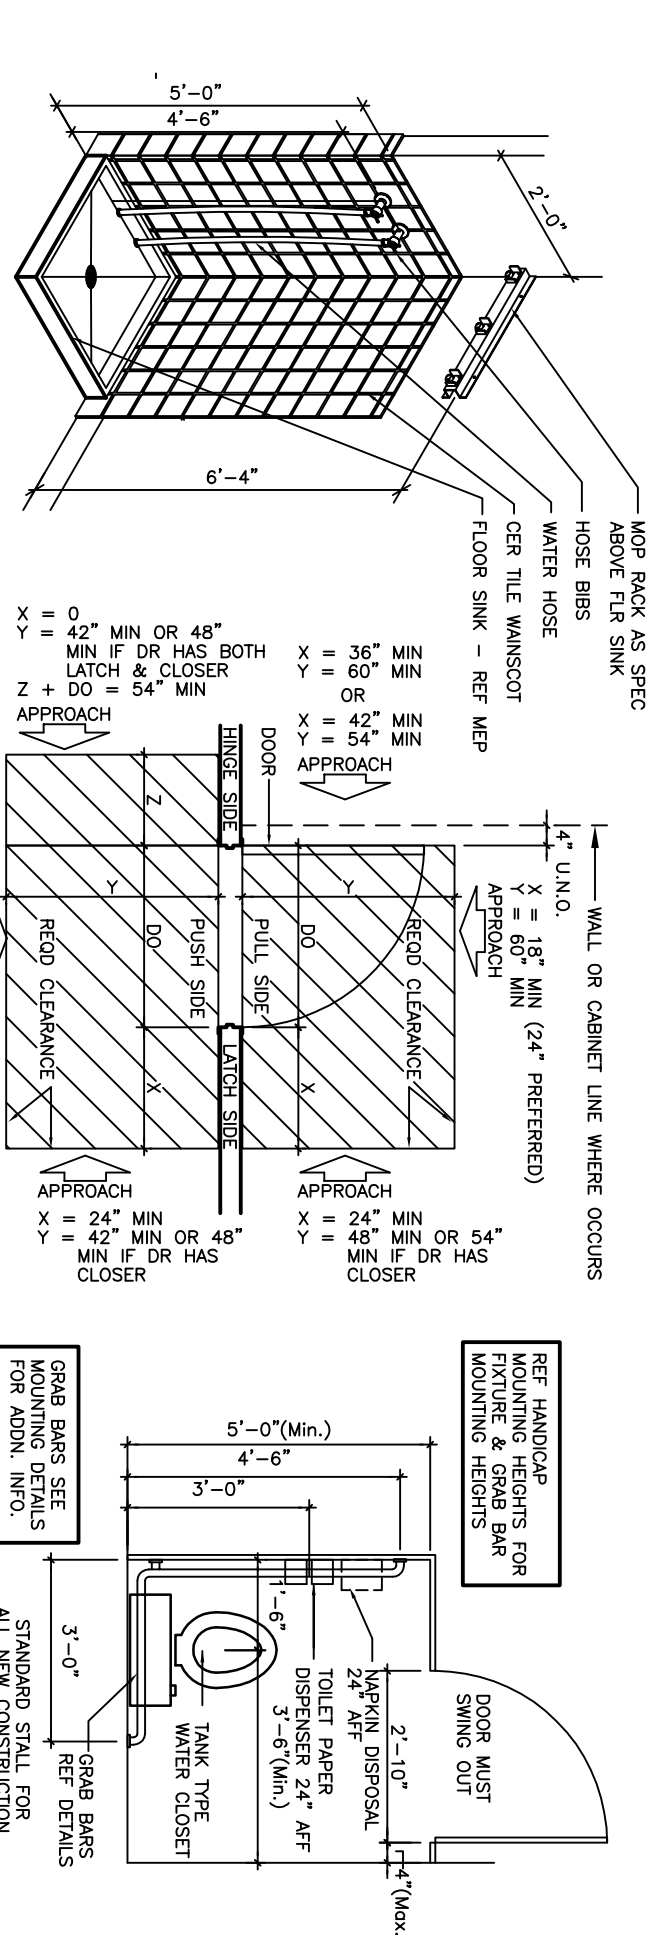

01 RESTROOM PLAN

SCALE: 1/2"=1'-0"

